



LIGHTING REVOLUTIONIZED

9439 IRONDALE AVE., CHATSWORTH, CALIFORNIA 91311 USA  
888-297-6660 www.CYRON.com

## Media Highlighter® RGB Controller HTC110A

Thank you for purchasing CYRON HTC110A Media Highlighter RGB controller.

### Contents

Please be sure to locate all the system components.

- 1 X Controller Module
- 1 X Hub
- Two-Sided Tape



### Installations


**1 Hub** Mount the hub using two-sided tape. Choose a location for the hub so it can be accessible for future upgrades. Plug the lights into any of the hub outlets. The plugs are polarized and can only be plugged in one direction. **CAUTION: Some painted surfaces may get damaged upon future removal of the tape.**

**2 Controller** Use the two-sided tape to mount the controller in an accessible location.

**3 Power Up** Plug a 12VDC supply to the DC power jack of the controller.

### Operation

Voltage range: 10VDC-13VDC  
Power: 18W max  
Current: 1.5A

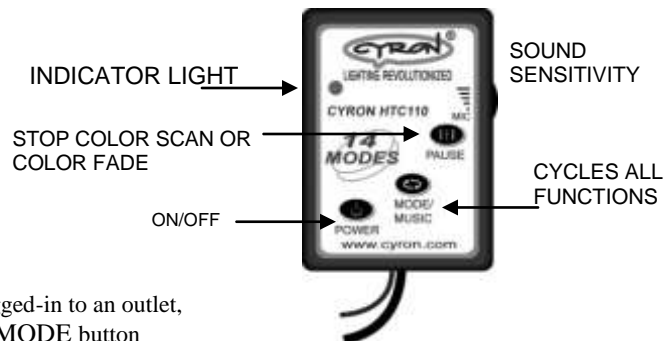

**System ON when power is supplied:** With the system still plugged-in to an outlet, turn the unit off using the POWER button. Press and hold the MODE button for 3 seconds. Turn the controller on. Now the unit will turn on automatically every time power is removed and restored. Plug the power supply to a switched power source like the receiver's "Switched Power" or wall outlet that is controlled by a switch. The light system will turn on every time the power is switched on.

**System OFF when power is supplied:** In a similar process as above, press and hold the PAUSE button for 3 seconds. The system will be off every time power is removed and restored. In this mode, the system can only be turned on from the controller by pressing the POWER button.

### Technical Support

Email: techsupport@cyron.com  
Phone (USA): 888-CYRON60 x106  
Phone (Int'l): 818-772-1900 x106



